

5A, Multi-Chemistry Battery Charger**Features**

- Wide Input Voltage: 7.5V to 28V
- Complete Charger Controller for 1 or multi-cell Lithium-ion Battery or LiFePO4 Battery
- Charge Current Up to 5A
- High PWM Switching Frequency: 300kHz
- Constant Charging Voltage Set By the External Resistor Divider
- Charging Current is programmed with a sense resistor
- Automatic Conditioning of Deeply Discharged Batteries
- End-of-Charge Current can be set by an external resistor
- Battery Temperature Monitoring
- Automatic Recharge
- Charger Status Indication
- Soft Start
- Battery Overvoltage Protection
- Operating Ambient Temperature -40°C to $+85^{\circ}\text{C}$
- Available in TSSOP-16 Package
- Pb-free, RoHS Compliant, and Halogen Free

Applications

- LiFePO4 Battery Charger
- Electric Tools
- Battery-Backup Systems
- Portable Industrial and Medical Equipment
- Standalone Battery Chargers

General Description


The HCR9745 is a PWM switch-mode battery charger controller for 1 or multi-cell lithium ion batteries or LiFePO4 batteries in a small package using few external components.

The HCR9745 is specially designed for charging lithium ion batteries or LiFePO4 batteries with constant current and constant voltage mode. In constant voltage mode, the regulation voltage is set by the external resistor divider. The constant charging current is programmable with a single sense resistor.

Deeply discharged batteries are automatically trickle charged at 15% of the programmed constant charging current until the cell voltage exceeds 66.7% of the regulation voltage in constant voltage mode. The charge cycle is terminated once the charging current drops to a level set by an on-chip resistor and an external resistor, and a new charge cycle automatically restarts if the battery voltage falls below 91.1% of the regulation voltage in constant voltage mode. HCR9745 will automatically enter sleep mode when input voltage is lower than battery voltage.

Other features include undervoltage lockout, battery temperature monitoring and status indication, etc.

HCR9745 is available in a space-saving TSSOP-16 package.



TSSOP-16

Figure 1 Appearance Diagram of HCR9745

5A, Multi-Chemistry Battery Charger

Pin Configuration

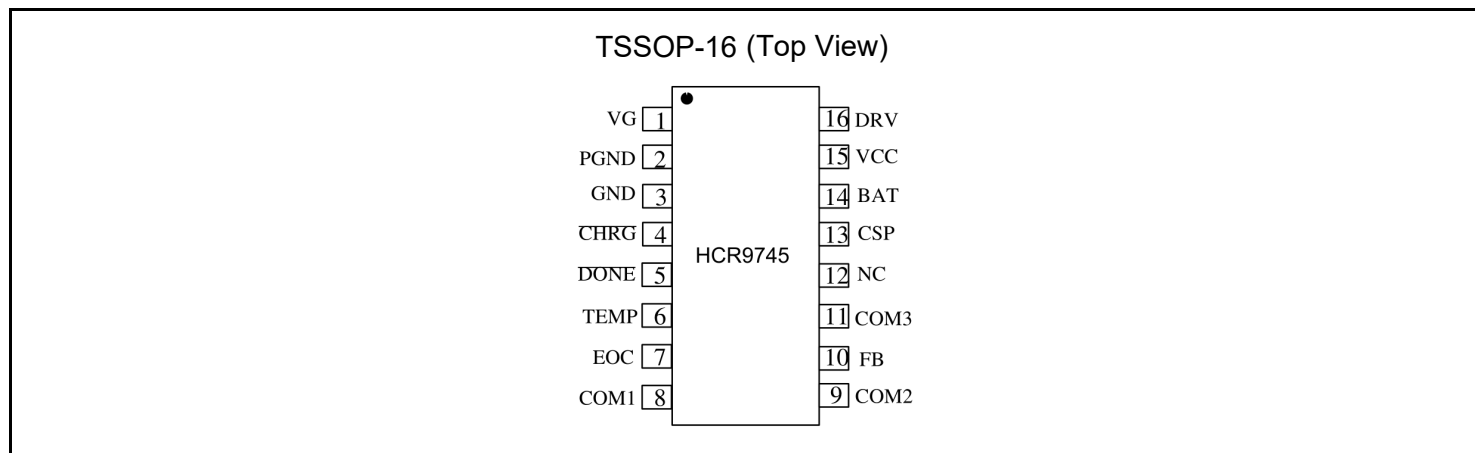



Figure 2. Pin Configuration (Top View)

Pin Descriptions

Pin No.	Name	Description
1	VG	Internal Voltage Regulator. VG internally supplies power to gate driver, connect a 100nF capacitor between VG pin and V _{CC} pin.
2	PGND	Power Ground.
3	GND	Analog Ground.
4	$\overline{\text{CHRG}}$	Open-Drain Output. When the battery is being charged, this pin is pulled low by an internal switch. Otherwise this pin is in high impedance state.
5	$\overline{\text{DONE}}$	Open-Drain Output. When the charging is terminated, this pin is pulled low by an internal switch. Otherwise this pin is in high impedance state.
6	TEMP	Battery Temperature Monitoring Input. Connect an NTC resistor from this pin to GND.
7	EOC	End-of-Charge Current Setting Pin. Connect this pin to GND directly or via a resistor.
8	COM1	Loop Compensation Input 1. Connect a 470pF capacitor from this pin to GND.
9	COM2	Loop Compensation Input 2. Connect a 220nF capacitor in series with an 120Ω resistor from this pin to GND.

5A, Multi-Chemistry Battery Charger
Pin Descriptions (Continued)

Pin No.	Name	Description
10	FB	Battery Voltage Feedback Input. Need to connect to the external resistor divider.
11	COM3	Loop Compensation Input 3. Connect an 100nF capacitor from this pin to GND.
12	NC	No Connection
13	CSP	Positive Input for Charging Current Sensing. This pin and the BAT pin measure the voltage drop across the sense resistor R_{CS} , to provide the current signals required.
14	BAT	Negative Input for Charging Current Sensing. This pin and the CSP pin measure the voltage drop across the sense resistor R_{CS} , to provide the current signals required.
15	V_{CC}	External DC Power Supply Input. V_{CC} is also the power supply for internal circuit. Bypass this pin with a capacitor.
16	DRV	Drive the gate of external P-channel MOSFET.

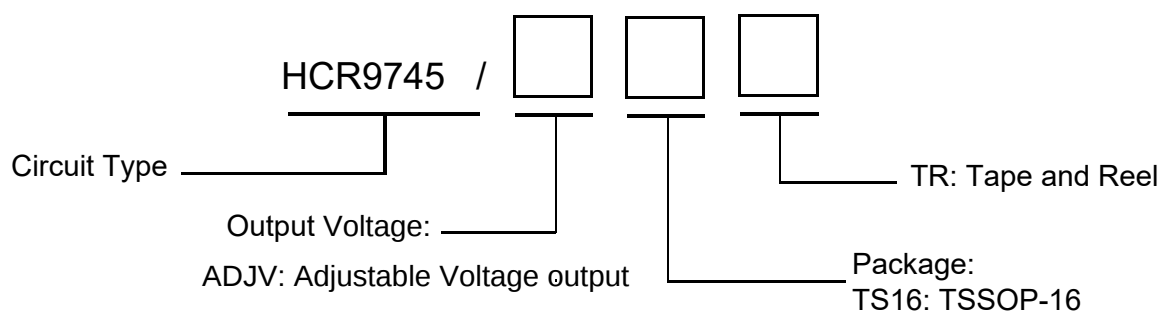Ordering Information

Ordering Code

Part Number	Marking ID (Note 2)	Temperature Range	Package	Quantity per Reel
HCR9745/ADJVTS16TR	HCR9745xx	-40 to +85°C	TSSOP-16	4000

Note 2: xx indicates the date code.

5A, Multi-Chemistry Battery Charger

Typical Application Circuit

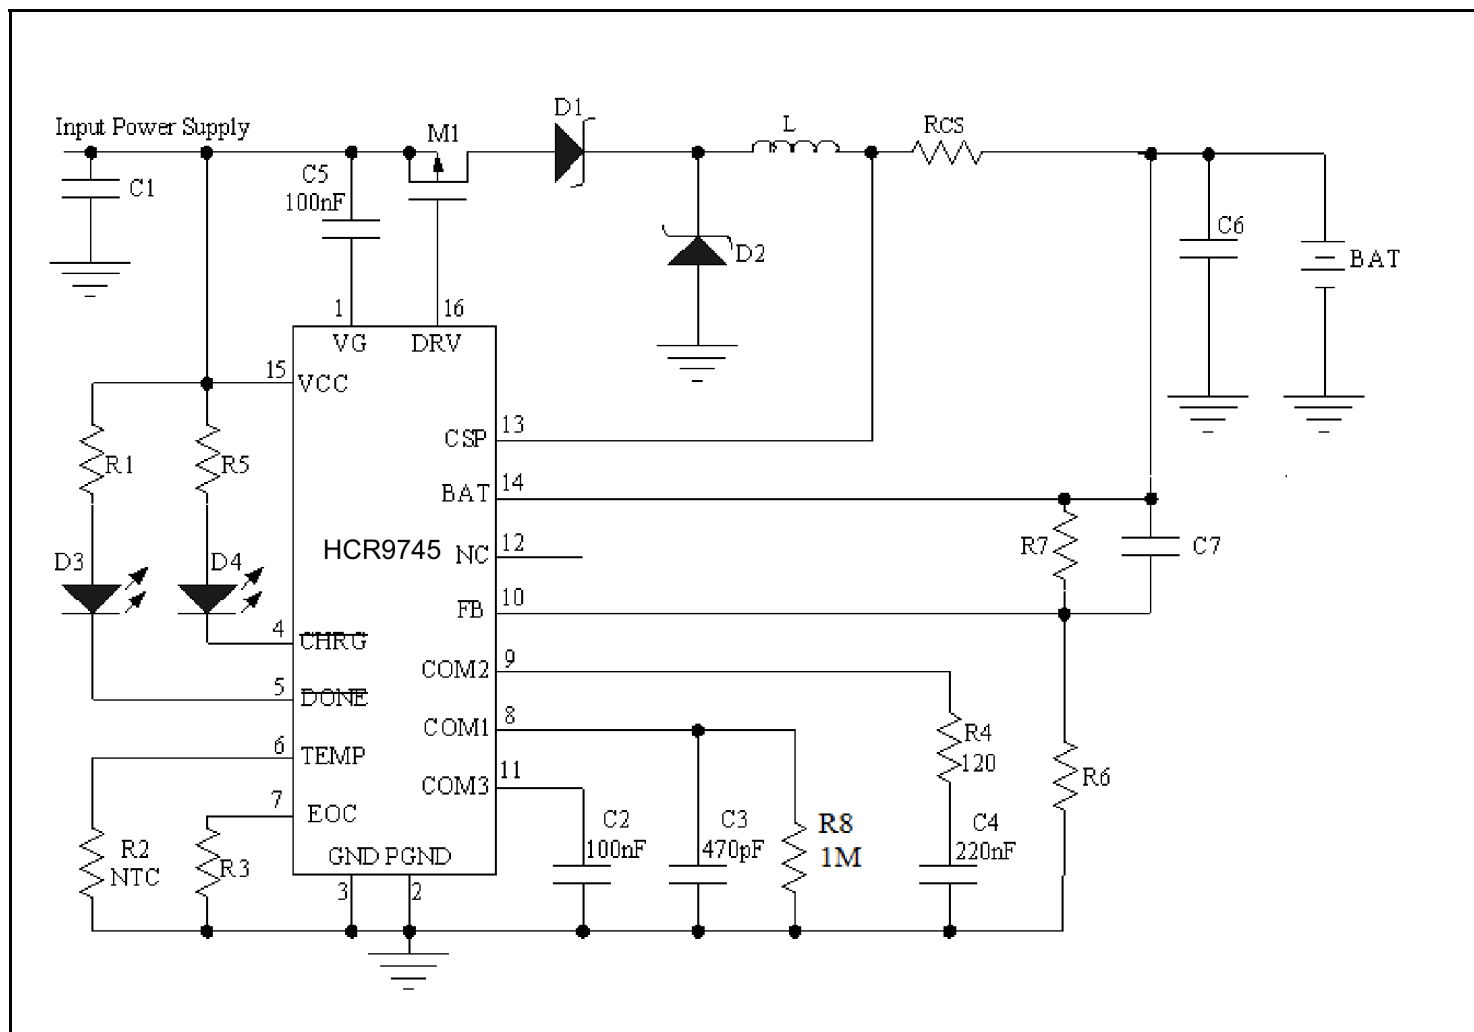


Figure 3. Typical Application Circuit

5A, Multi-Chemistry Battery Charger**Absolute Maximum Ratings**

Parameter	Min.	Max.	Unit
Voltage from V_{CC} , $\overline{CHRG}$, $\overline{DONE}$ to GND	-0.3	30	V
Voltage from VG, DRV to GND	—	8	V
Voltage from CSP, BAT to GND	-0.3	28	V
Voltage from COM3 to GND	—	6.5	V
Voltage from Other Pins to GND	-0.3	$V_{COM3} + 0.3$	V
Storage Temperature	-65	150	°C
Operating Ambient Temperature	-40	85	°C
Lead Temperature (Soldering, 10 seconds)	—	260	°C

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to Absolute Maximum Rating Conditions for extended periods may affect device reliability.

Recommend Operating Conditions

Parameter	Symbol	Min.	Max.	Unit
Input Voltage Range	V_{CC}	7.5	28	V
Operating Ambient Temperature	T_A	-40	85	°C

5A, Multi-Chemistry Battery Charger

Electrical Characteristics

($V_{CC} = 15V$, $T_A = -40^{\circ}C$ to $85^{\circ}C$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	V_{CC}	—	7.5	—	28	V
Undervoltage Lockout Threshold	UVLO	—	4.2	6	7.3	V
Operating Current	I_{VCC}	No switching	1	1.55	2.1	mA
Feedback Voltage	V_{FB}	FB pin, Constant voltage mode	2.392	2.416	2.44	V
FB Pin Bias Current	I_{FB}	$V_{FB} = 2.4V$	—	50	300	nA
Current Sense	V_{CS}	$V_{BAT} > 66.7\% \times V_{REG}$, $V_{CSP} - V_{BAT}$	185	200	215	mV
Current Sense	V_{CS}	$V_{BAT} < 66.7\% \times V_{REG}$, $V_{CSP} - V_{BAT}$	15	27	42	mV
Current into BAT Pin	I_{BAT}	$V_{BAT} = 12V$	5	10	15	μA
Precharge Threshold	V_{PRE}	V_{BAT} rising	—	66.7%	—	V_{REG}
Recharge Threshold	V_{RE}	V_{BAT} falling	—	91.1%	—	V_{REG}
Overvoltage Trip Level	V_{OV}	V_{BAT} rising	1.06	1.08	1.1	V_{REG}
Overvoltage Clear Level	V_{CLR}	V_{BAT} falling	0.98	1	1.02	V_{REG}
TEMP Pin						
Pull up Current	I_{UP}	—	42	55	68	μA
High Threshold	V_{THH}	TEMP Voltage Rising	1.57	1.61	1.65	V
Low Threshold	V_{THL}	TEMP Voltage Falling	0.145	0.175	0.205	V
CHRG Pin						
CHRG Pin Sink Current	I_{CHRG}	$V_{CHRG} = 1V$, charge mode	7	12	18	mA
CHRG Leakage Current	I_{LK1}	$V_{CHRG} = 25V$, termination mode	—	—	1	μA

5A, Multi-Chemistry Battery Charger
Electrical Characteristics (Continued)

($V_{CC} = 15V$, $T_A = -40^{\circ}C$ to $85^{\circ}C$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
DONE Pin						
DONE Sink Current	I_{DONE}	$V_{DONE} = 1V$, termination mode	7	12	18	mA
DONE Leakage Current	I_{LK2}	$V_{DONE} = 25V$, charge mode	—	—	1	μA
Oscillator						
Switching Frequency	f_{osc}	—	240	300	360	kHz
Maximum Duty Cycle	D_{max}	—	—	94	—	%
Sleep Mode						
Sleep Mode Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLP}	V_{CC} falling, $V_{BAT} = 8V$	0.06	0.1	0.14	V
Sleep Mode Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLP}	V_{CC} falling, $V_{BAT} = 12V$	0.1	0.14	0.18	V
Sleep Mode Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLP}	V_{CC} falling, $V_{BAT} = 18V$	0.18	0.23	0.28	V
Sleep Mode Release Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLPR}	V_{CC} rising, $V_{BAT} = 8V$	0.26	0.32	0.39	V
Sleep Mode Release Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLPR}	V_{CC} rising, $V_{BAT} = 12V$	0.32	0.42	0.52	V
Sleep Mode Release Threshold (measure $V_{CC} - V_{BAT}$)	V_{SLPR}	V_{CC} rising, $V_{BAT} = 18V$	0.38	0.47	0.58	V
DRV Pin						
V_{DRV} High ($V_{CC} - V_{DRV}$)	V_H	$I_{DRV} = -10mA$	—	60	—	mV
V_{DRV} Low ($V_{CC} - V_{DRV}$)	V_L	$I_{DRV} = 0mA$	5	6.5	8	V
Rise Time	t_r	$C_{load} = 2nF$, 10% to 90%	30	40	65	ns
Fall Time	t_f	$C_{load} = 2nF$, 90% to 10%	30	40	65	ns

Note 1: V_{REG} is the regulation voltage at BAT pin in constant voltage mode.

5A, Multi-Chemistry Battery Charger

Detailed Description

The HCR9745 is a constant current, constant voltage battery charger controller that adopts PWM step-down (buck) switching architecture, the device is specially designed for 1 or multi-cell Li-Ion battery or LiFePO4 batteries. The charge current is set by an external sense resistor (R_{CS}) across the CSP and BAT pins. The final battery regulation voltage V_{REG} in constant voltage mode is set by the external resistor divider.

A charge cycle begins when the voltage at the V_{CC} pin rises above the UVLO level and is greater than the battery voltage by sleep mode release threshold V_{SLPR} . At the beginning of the charge cycle, if the battery voltage is less than $66.7\% \times V_{REG}$, the charger goes into trickle charge mode. The trickle charge current is internally set to 15% (Typical) of the full-scale current. When the battery voltage exceeds $66.7\% \times V_{REG}$, the charger goes into the full-scale constant current charge mode. In constant current mode, the charge current is set by the external sense resistor R_{CS} and an internal 200mV reference, so the charge current equals to $200\text{mV}/R_{CS}$. When the battery voltage approaches the regulation voltage, the charger goes into constant voltage mode, and the charge current will start to decrease.

When the charge current drops to a level that is set by the resistor at EOC pin, the charge cycle is terminated, the DRV pin is pulled up to V_{CC} , and an internal comparator turns off the internal pull-down N-channel MOSFET at the $\overline{\text{CHRG}}$ pin to indicate that the charge cycle is terminated. During the charge cycle termination status, another internal pull-down N-channel MOSFET at the $\overline{\text{DONE}}$ pin is turned on to indicate the termination status.

To restart the charge cycle, just remove and reapply the input voltage. Also, a new charge cycle will begin if the battery voltage drops below the recharge threshold voltage of $91.1\% \times V_{REG}$.

When the input voltage is not present, the charger goes into sleep mode.

A 10k Ω NTC (negative temperature coefficient) thermistor can be connected from the TEMP pin to ground for battery temperature qualification. The charge cycle is suspended if the battery's temperature is outside of the acceptable range.

An overvoltage comparator guards against voltage transient overshoots ($>8\%$ of regulation voltage). In this case, P-channel MOSFET are turned off until the overvoltage condition is cleared. This feature is useful for battery load dump or sudden removal of battery.

The charging profile is shown in Figure 4.

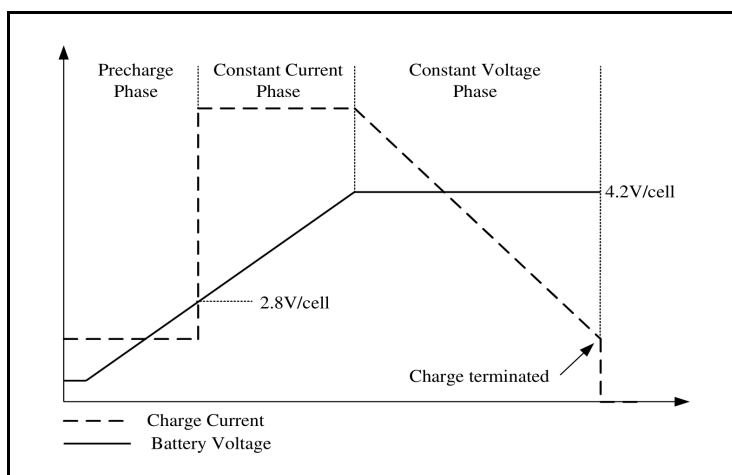


Figure 4. The Charging Profile

5A, Multi-Chemistry Battery Charger

Application Information

Undervoltage Lockout (UVLO)

An undervoltage lockout circuit monitors the input voltage and keeps the charger off if V_{CC} falls below 6V(Typical).

Set the Regulation Voltage in Constant Voltage Mode

As shown in Figure 1, battery voltage is feedback to FB pin via the resistor divider composed of R6 and R7. HCR9745 decided the charging status based on FB's voltage. When FB's voltage approaches 2.416V, the charger goes into constant voltage mode. In constant voltage mode, the charge current decrease gradually, and the battery voltage remains unchanged.

In light of FB pin's bias current, the regulation voltage in constant voltage mode is determined by the following equation:

$$V_{BAT} = 2.416 \times (1 + R7 / R6) + I_B \times R7$$

Where, I_B is FB pin's bias current, which is 50nA typical.

From the above equation, we can see that an error is introduced due to the existence of bias current I_B , the error is $I_B \times R7$. If $R7=500K\Omega$, then the error is about 25mV. So the error should be taken into account while designing the resistor divider.

The maximum regulation voltage that can be set is 25V.

Trickle Charge Mode

At the beginning of a charge cycle, if the battery voltage is below $66.7\% \times V_{REG}$, the charger goes into trickle charge mode with the charge current reduced to 15% of the full-scale current.

Charge Current Setting

The full-scale charge current, namely the charge current in constant current mode, is decided by the following formula:

$$I_{CH} = \frac{200mV}{R_{CS}}$$

Where:

I_{CH} is the full scale charge current

R_{CS} is the resistor between the CSP pin and BAT pin

End-of-Charge Current Setting

End-of-charge current can be set by connecting a resistor from EOC pin to GND, and is decided by the following equation:

$$I_{EOC} = \frac{1.278 \times (14350 + R_{ext})}{R_{CS} \times 10^5}$$

Where:

- I_{EOC} is the end-of-charge current in Ampere
- R_{ext} is the external resistance from EOC pin to GND in Ω . R_{ext} can not be great than 100K Ω , otherwise the charging may not be terminated correctly.
- R_{CS} is the current sense resistance between CSP pin and BAT pin in Ω

It is our interest to calculate the ratio between I_{EOC} and I_{CH} :

$$\frac{I_{EOC}}{I_{CH}} = \frac{\frac{1.278 \times (14350 + R_{ext})}{R_{CS} \times 10^5}}{\frac{0.2}{R_{CS}}} = \frac{1.278 \times (14350 + R_{ext})}{0.2 \times 10^5}$$

When $R_{ext}=0\Omega$, the minimum $I_{EOC}/I_{CH}=9.17\%$

5A, Multi-Chemistry Battery Charger

Application Information

When $R_{ext}=100K\Omega$, the maximum $I_{EOC}/I_{CH}=73\%$

Automatic Battery Recharge

After the charge cycle is completed and both the battery and the input power supply (wall adapter) are still Connected, a new charge cycle will begin if the battery voltage drops below $91.1\% \times V_{REG}$ due to self-discharge or external loading. This will keep the battery capacity at more than 80% at all times without manually restarting the charge cycle.

Battery Temperature Monitoring

A negative temperature coefficient (NTC) thermistor located close to the battery pack can be used to monitor battery temperature and will not allow charging unless the battery temperature is within an acceptable range.

Connect a 10k Ω thermistor from the TEMP pin to ground. Internally, for hot temperature, the low voltage threshold is set at 175mV which is equal to 50°C ($R_{NTC} \approx 3.2k\Omega$). For cold temperature, the high voltage threshold is set at 1.61V which is equal to 0°C ($R_{NTC} \approx 28k\Omega$) with 50 μ A of pull-up current.

Once the temperature is outside the window, the charge cycle will be suspended, and the charge cycle resumes if the temperature is back to the acceptable range.

The TEMP pin's pull up current is about 55 μ A, so the NTC thermistor's resistance should be 10k Ω at 25°C, about 3.2k Ω at hot temperature threshold, and about 28k Ω at cold temperature threshold. The NTC thermistor such as TH11-3H103F, MF52(10 k Ω), QWX-103 and NCP18XH103F03RB can work well with HCR9745. The above mentioned part numbers are for reference only, the users can select the right NTC thermistor part number based on their requirements.

If the thermistor with negative temperature coefficient is tightly bonded to the battery pack and connected to the TEMP pin of HCR9745 through the connector, the circuit shown in Figure 5 should be

used to avoid damage to the chip when plugging and unplugging the battery.

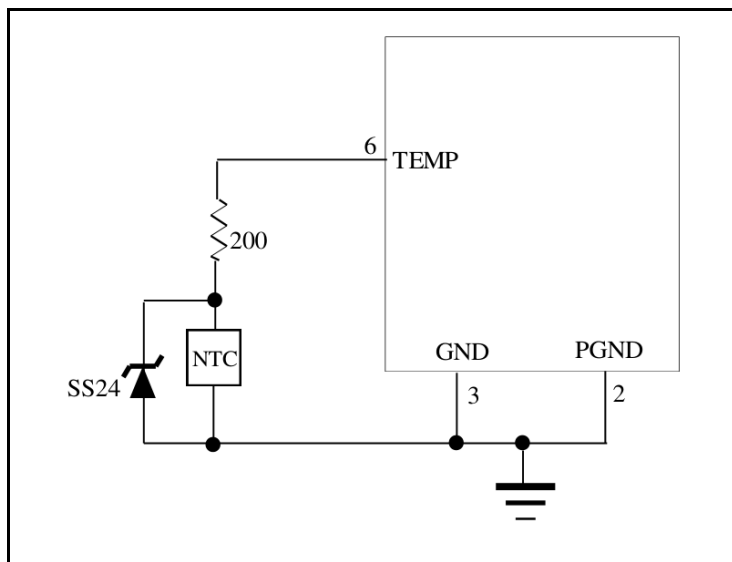


Figure 5. Using Battery Temperature Monitoring Function

If battery temperature monitoring function is not needed, just connect a 10k Ω resistor from TEMP pin to GND.

Status Indication

The HCR9745 has 2 open-drain status outputs: $\overline{CHRG}$ and $\overline{DONE}$. $\overline{CHRG}$ is pulled low when the charger is in charging status, otherwise $\overline{CHRG}$ becomes high impedance. $\overline{DONE}$ is pulled low if the charger is in charge termination status, otherwise $\overline{DONE}$ becomes high impedance.

When the battery is not present, the charger charges the output capacitor to the regulation voltage quickly, then the BAT pin's voltage decays slowly to recharge threshold because of low leakage current at BAT pin, which results in a ripple waveform at BAT pin, in the meantime, $\overline{CHRG}$ pin outputs a pulse to indicate that the battery's absence.

The open drain status output that is not used should be tied to ground.

5A, Multi-Chemistry Battery Charger

Application Information

The table 1 lists the two indicator status and its corresponding charging status. It is supposed that red LED is connected to $\overline{\text{CHRG}}$ pin and green LED is connected to $\overline{\text{DONE}}$ pin.

$\overline{\text{CHRG}}$ pin	$\overline{\text{DONE}}$ pin	State Description
Low (the red LED on)	High Impedance (the green LED off)	Charging
High Impedance (the red LED off)	Low (the green LED on)	Charge termination
Pulse signal	Pulse signal	Battery not connected
High Impedance (the red LED off)	High Impedance (the green LED off)	There are three possible state: - the voltage at the V_{CC} pin below the UVLO level or - the voltage at the V_{CC} pin below V_{BAT} or - abnormal battery's temp

Table 1 Indication Status

Gate Drive

The HCR9745's gate driver can provide high transient currents to drive the external pass transistor. The rise and fall times are typically 40ns when driving a 2000pF load, which is typical for a P-channel MOSFET with $R_{\text{ds(on)}}$ in the range of 50m Ω .

A voltage clamp is added to limit the gate drive to 8V max. below V_{CC} . For example, if V_{CC} is 20V, then the DRV pin output will be pulled down to 12V min. This allows low voltage P-channel MOSFETs with superior $R_{\text{ds(on)}}$ to be used as the pass transistor thus increasing efficiency.

Loop Compensation

In order to make sure that the current loop and the voltage loop are stable, the following compensation components are necessary:

- (1)A 470pF capacitor from the COM1 pin to GND
- (2)A series 220nF ceramic capacitor and 120 Ω resistor from the COM2 pin to GND

- (3)An 100nF ceramic capacitor from the COM3 pin to GND

- (4)The capacitance C7 in Figure 1 can be roughly calculated by: $C7=8 \times (R6 / R7)$ (pF)

Battery Detection

HCR9745 does not provide battery detection function, when the battery is not present, the charger charges the output capacitor to the regulation voltage quickly, then the BAT pin's voltage decays slowly to recharge threshold because of low leakage current at BAT pin, which results in a ripple waveform at BAT pin, in the meantime, $\overline{\text{CHRG}}$ pin outputs a pulse to indicate that the battery's absence.

It is generally not a good practice to connect a battery while the charger is running. The charger may provide a large surge current into the battery for a brief time.

5A, Multi-Chemistry Battery Charger

Application Information (Continued)

Input and Output Capacitors

Since the input capacitor is assumed to absorb all input switching ripple current in the converter, it must have an adequate ripple current rating. Worst-case RMS ripple current is approximately one-half of output charge current.

The selection of output capacitor is primarily determined by the ESR required to minimize ripple voltage and load step transients. Generally speaking, a 10μF ceramic capacitor can be used.

Inductor Selection

During P-channel MOSFET's on time, the inductor current increases, and decreases during P-channel MOSFET's off time, the inductor's ripple current increases with lower inductance and higher input voltage. Higher inductor ripple current results in higher charge current ripple and greater core losses. So the inductor's ripple current should be limited within a reasonable range.

The inductor's ripple current is given by the following formula:

$$\Delta I_L = \frac{1}{f(L)} V_{BAT} \left(1 - \frac{V_{BAT}}{V_{CC}}\right)$$

Where,

f is the switching frequency 300kHz

L is the inductor value

V_{BAT} is the battery voltage

V_{CC} is the input voltage

A reasonable starting point for setting inductor ripple current is $\Delta I_L = 0.4 \times I_{CH}$, I_{CH} is the charge current.

Remember that the maximum ΔI_L occurs at the maximum input voltage and the lowest inductor value. So lower charge current generally calls for larger inductor value.

Use Table 2 as a guide for selecting the correct inductor value for your application.

Charge Current	Input Voltage	Inductor Value
1A	>20V	40μH
1A	<20V	30μH
2A	>20V	30μH
2A	<20V	20μH
3A	>20V	20μH
3A	<20V	15μH
4A	>20V	15μH
4A	<20V	10μH
5A	>20V	10μH
5A	<20V	8μH

Table 2 Guide to Select Inductor Value

MOSFET Selection

The HCR9745 uses a P-channel power MOSFET switch. The MOSFET must be selected to meet the efficiency or power dissipation requirements of the charging circuit as well as the maximum temperature of the MOSFET.

The peak-to-peak gate drive voltage is set internally, this voltage is typically 6.5V. Consequently, logic-level threshold MOSFETs must be used. Pay close attention to the BV_{DSS} specification for the MOSFET as well; many of the logic level MOSFETs are limited to 30V or less.

Selection criteria for the power MOSFET includes the "on" resistance $R_{ds(on)}$, total gate charge Q_g , reverse transfer capacitance C_{RSS} , input voltage and maximum charge current.

5A, Multi-Chemistry Battery Charger

Application Information (Continued)

The MOSFET power dissipation at maximum output current is approximated by the equation:

$$P_d = \frac{V_{BAT}}{V_{CC}} \times R_{ds(on)} \times I_{CH}^2 \times (1 + 0.005 dT)$$

Where:

P_d is the power dissipation of the power MOSFET

V_{BAT} is the maximum battery voltage

V_{CC} is the minimum input voltage

$R_{ds(on)}$ is the power MOSFET's on resistance at room temperature

I_{CH} is the charge current

dT is the temperature difference between actual ambient temperature and room temperature(25°C)

In addition to the $I^2 R_{ds(on)}$ loss, the power MOSFET still has transition loss, which are highest at the highest input voltage. Generally speaking, for $V_{IN} < 20V$, the $I^2 R_{ds(on)}$ loss may be dominant, so the MOSFET with lower $R_{ds(on)}$ should be selected for better efficiency; for $V_{IN} > 20V$, the transition loss may be dominant, so the MOSFET with lower C_{RSS} can provide better efficiency. C_{RSS} is usually specified in the MOSFET characteristics; if not, then C_{RSS} can be calculated using $C_{RSS} = Q_{GD} / \Delta V_{DS}$.

The MOSFETs such as AO4459, STM9435(or WT9435), AO3407A can be used. The part numbers listed above are for reference only, the users can select the right MOSFET based on their requirements.

Diode Selection

The diodes D1 and D2 in Figure 3 are schottky diode, the current rating of the diodes should be at least the charge current limit, the voltage rating of the diode should exceed the maximum expected input voltage.

The diode that is much larger than that is sufficient can result in larger transition losses due to their larger junction capacitance.

Disable Charging with TEMP Pin

The charging can be disabled with TEMP pin, as shown in Figure 6:

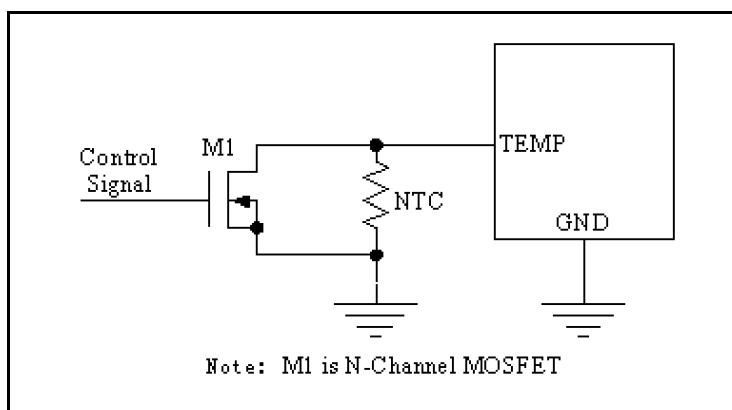


Figure 6. Disable Charging With TEMP Pin

When control signal is high, N-channel MOSFET M1 is turned on, the voltage at TEMP pin is pulled down to GND, which will disable the charging;

When control signal is low, N-channel MOSFET is turned off, the voltage at TEMP pin is determined by NTC thermistor, which performs normal battery temperature monitoring function.

About Battery Current In Sleep Mode

In the typical application circuit shown in Figure 3, when input voltage is powered off or lower than battery voltage, HCR9745 will enter sleep mode. In sleep mode, the battery current includes:

(1) The current into BAT pin and CSP pin, which is about $10\mu A (V_{BAT}=12V)$.

(2) The current from battery to V_{CC} pin via diode D1, which is determined by D1's leakage current.

The current will charge capacitance C1 at V_{CC} pin, which will make V_{CC} voltage a bit higher. To avoid erratic operation, a resistor in parallel with capacitance C1 may be needed to discharge the capacitance, the resistor value is determined by diode D1's leakage, generally speaking, a 20KΩ resistor can achieve the task.

5A, Multi-Chemistry Battery Charger

Application Information (Continued)

(3) The current from battery to GND via diode D2, which is also determined by D2's leakage current.

PCB Layout Considerations

When laying out the printed circuit board, the following considerations should be taken to ensure proper operation of the IC.

(1) To minimize radiation, the 2 diodes, pass transistor, inductor and the input bypass capacitor traces should be kept as short as possible. The positive side of the input capacitor should be close to the source of the P-channel MOSFET; it provides the AC current to the pass transistor. The connection between the catch diode and the pass transistor should also be kept as short as possible.

(2) The compensation capacitor connected at the COM1, COM2 and COM3 pins should return to the analog ground pin of the IC. This will prevent ground noise from disrupting the loop stability.

(3) Output capacitor ground connections need to feed into same copper that connects to the input capacitor ground before tying back into system ground.

(4) Analog ground and power ground(or switching ground) should return to system ground separately.

(5) The ground pins also works as a heat sink, therefore use a generous amount of copper around the ground pins. This is especially important for high V_{CC} and/or high gate capacitance applications.

(6) Place the charge current sense resistor R_{CS} right next to the inductor output but oriented such that the IC's CSP and BAT traces going to R_{CS} are not long. The 2 traces need to be routed together as a single pair on the same layer at any given time with smallest trace spacing possible.

(7) The CSP and BAT pins should be connected directly to the current sense resistor (Kelvin sensing) for best charge current accuracy. See Figure 7 as an example.


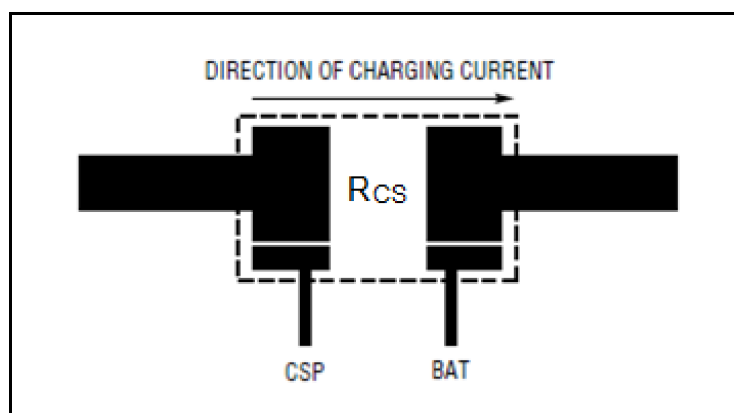


Figure 7. Kelvin Sensing of Charge Current

5A, Multi-Chemistry Battery Charger

Package Outline Dimensions

TSSOP-16

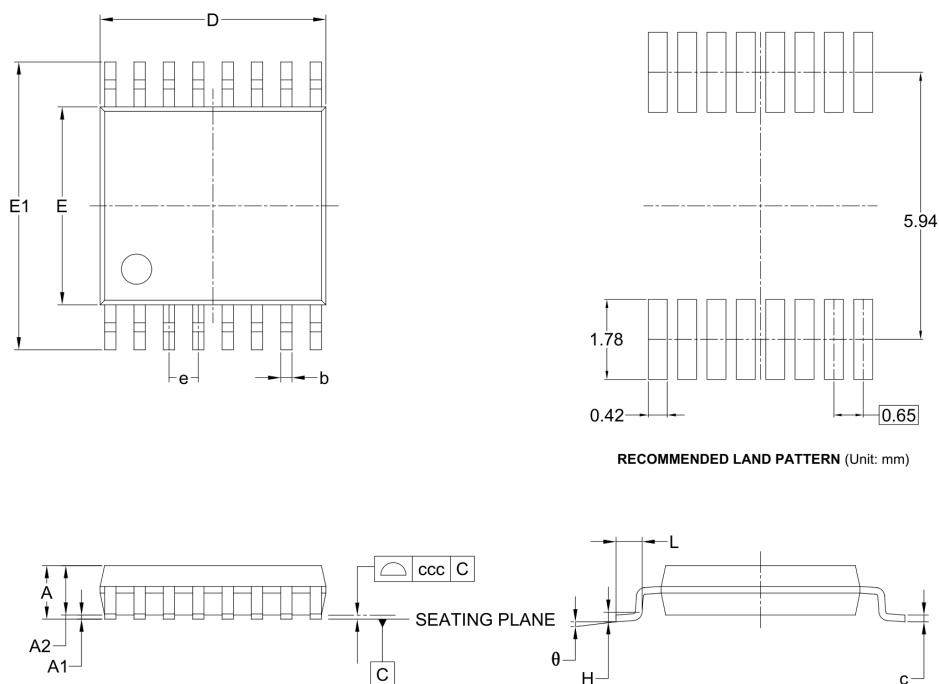


Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX
A	—	—	1.200
A1	0.050	—	0.150
A2	0.800	—	1.050
b	0.190	—	0.300
c	0.090	—	0.200
D	4.860	—	5.100
E	4.300	—	4.500
E1	6.200	—	6.600
e	0.650 BSC		
L	0.450	—	0.750
H	0.250 TYP		
θ	0°	—	8°
ccc	0.100		

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-153.


5A, Multi-Chemistry Battery Charger

Tape and Reel Information

REEL DIMENSIONS

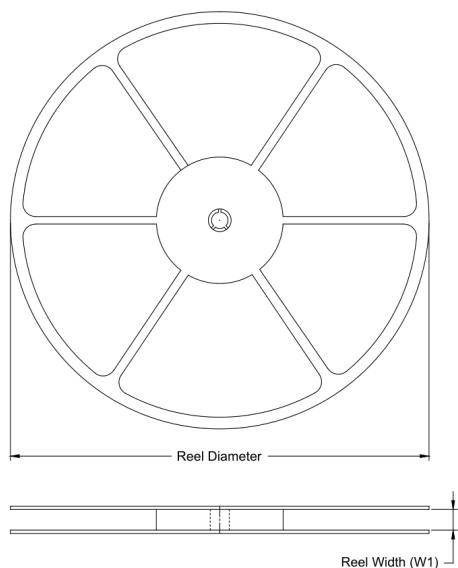

TAPE DIMENSIONS

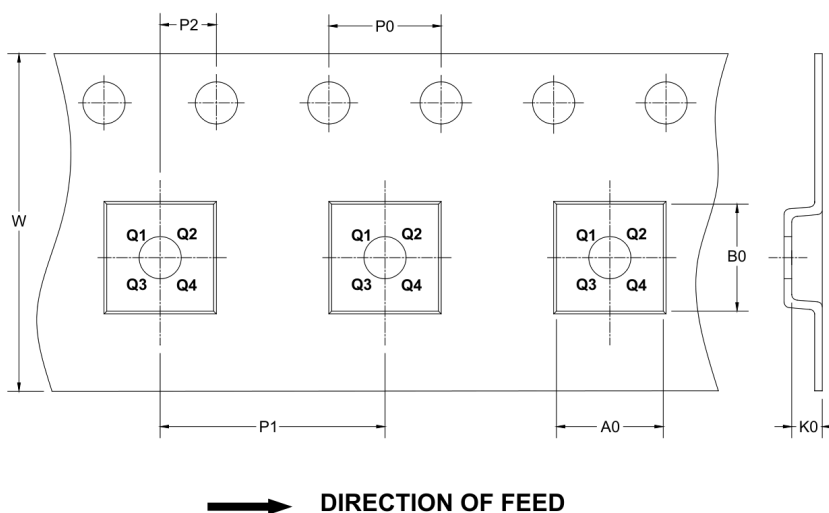

NOTE: The picture is only for reference. Please make the object as the standard.

Key Parameter List of Tape and Reel


Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP-16	13"	12.4	6.90	5.60	1.50	4.0	8.0	2.0	12.0	Q1

Quantity per Reel: 4000

5A, Multi-Chemistry Battery Charger

Conditions of Soldering and Storage

Recommended Condition of Reflow Soldering

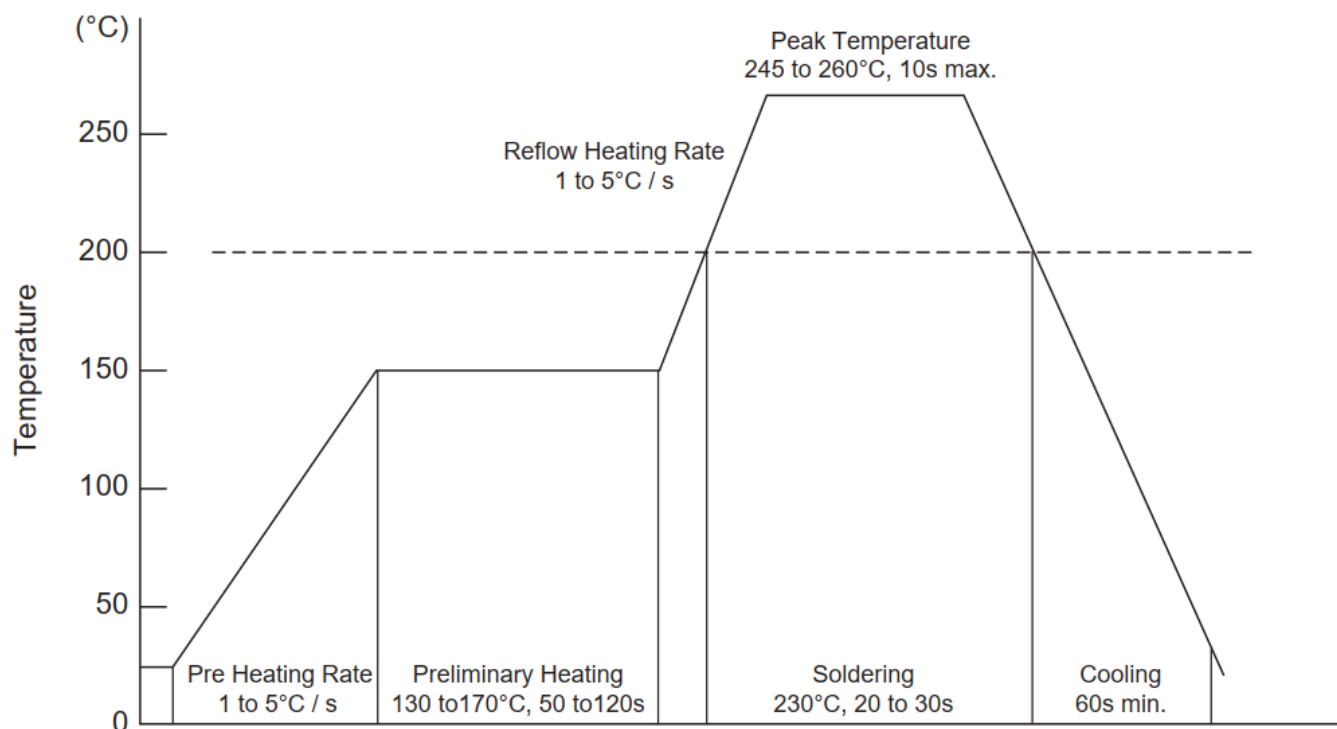

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

Conditions of Hand Soldering

- Temperature: 300°C
- Time: 3s max
- Times: one time

Storage Conditions

- Temperature: 5 to 40°C
- Humidity: 30 to 80% RH
- Recommended period: One year after manufacturing