

Low-noise High Voltage Dual Operational Amplifiers**Features**

- * Large Signal Voltage Gain: 110dB Typical
- * Operating Voltage: up to 36V (dual $\pm$ 18V)
- * Low Noise Voltage: 0.46 μ V $\sqrt{\text{Hz}}$
- * Low Distortion: 0.0005%
- * High Slew Rate: 6V/ μ s Typical
- * Wide Gain Bandwidth: 15MHz at 10KHz
- * Temperature range : -40°C to +125°C

Applications

- * Audio AC-3 Decoder System
- * Audio Amplifier
- * Low Noise Amplifier Front End
- * DAC Output Amplifier
- * Precision Instrumentation

General Description

The HCRM4580 is a high performance, low noise dual operational amplifier. It is specifically designed for audio systems to improve tone control; it can be used in pre-amplifier, industrial measurement tools and applications where gain and phase matched channels are mandatory.

The HCRM4580 feature internal frequency compensation, low noise, low distortion, high gain and high bandwidth. The HCRM4580 can operate under dual power supply voltage up to $\pm$ 18V or single power supply up to 36V.

The HCRM4580 is available in Green SOIC-8(SOP8), TSSOP-8, MSOP8 and DIP-8 package. It is specified over the extended -40°C to +125°C temperature range.

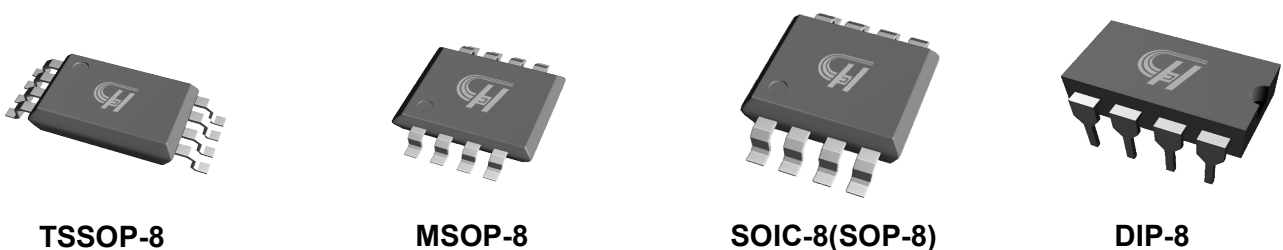


Figure 1. Package Type of HCRM4580

Low-noise High Voltage Dual Operational Amplifiers

Pin Configuration


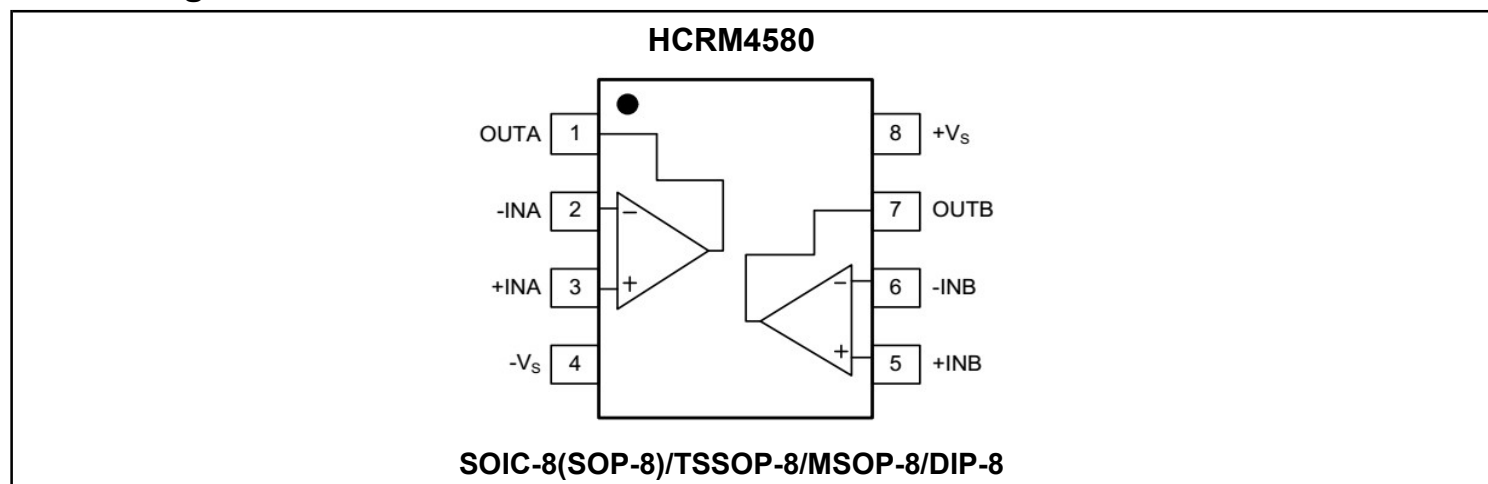


Figure 2. Pin Configuration of HCRM4580 (Top View)

Pin Function Table

Pin	Name	Function
3, 5	+IN A, +IN B	Non-inverting Inputs
2, 6	-IN A, -IN B	Inverting Inputs
8	+Vs	Positive Power Supply
4	-Vs	Negative Power Supply
1, 7	OUTA, OUTB	Outputs

Ordering Information

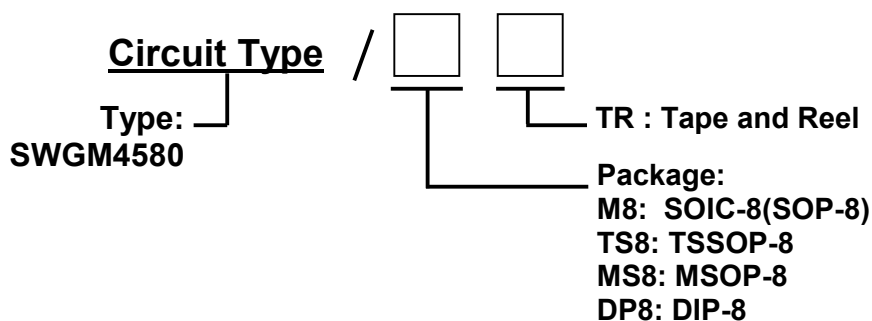

Ordering Code

Part Number	Marking ID ^{note1}	Temperature Range	Package	Package Type
HCRM4580/M8TR	HCRM4580MXX	-40°C to +125°C	SOIC-8 (SOP-8)	4000pcs/TR
HCRM4580/TS8TR	HCRM4580TXX	-40°C to +125°C	TSSOP-8	5000pcs/TR
HCRM4580/MS8TR	HCRM4580SXX	-40°C to +125°C	MSOP-8	4000pcs/TR
HCRM4580/DP8TR	HCRM4580DXX	-40°C to +125°C	DIP-8	1K/Tuble

Note 1. the "XX" is date code as refer to message

Low-noise High Voltage Dual Operational Amplifiers

Functional Block Diagram

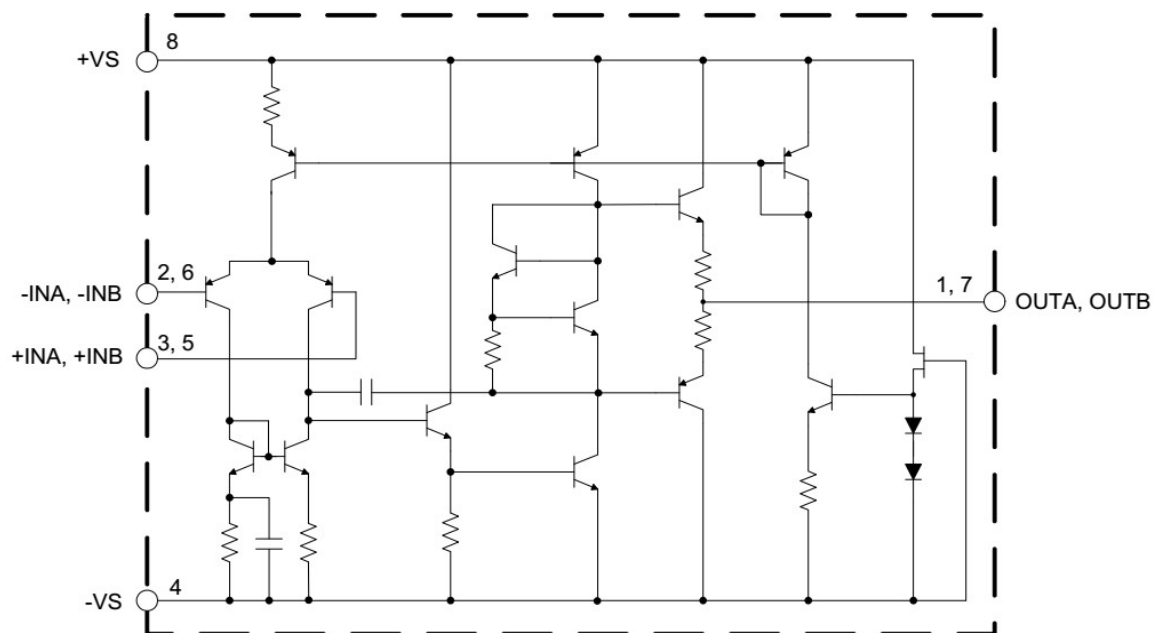


Figure 3. Pin Configuration of HCRM4580 (Top View)

Typical Applications

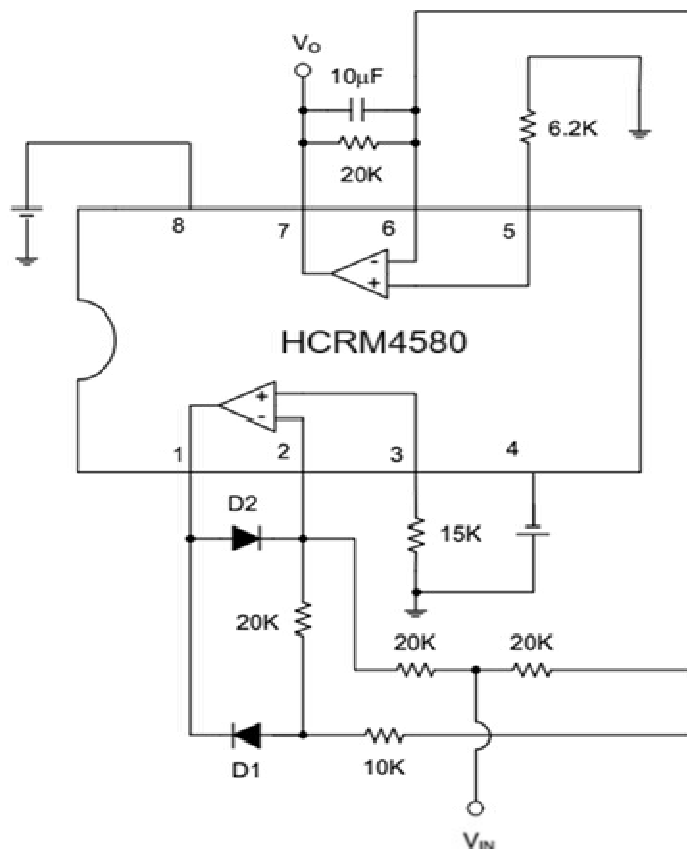


Figure 4. Application of HCRM4580 in an AC/DC Converter

Low-noise High Voltage Dual Operational Amplifiers

Absolute Maximum Ratings ^{Note 2}

Parameter		Symbol	Value	Unit
Supply Voltage, +Vs to -Vs		V+	+20	V
		V-	-20	
Input Voltage, VIN		VIN	±15	V
Differential Input Voltage		VDF	±30	V
Power Dissipation @TA=+25°C	TSSOP-8	Pd	400	mW
	MSOP-8		420	mW
	SOIC-8 /SOP-8		500	mW
	DIP-8		800	mW
Storage Temperature Range		TSTG	-65 to +150	°C
Operating Temperature Range ^{note 2}		TOPR	-40 to +85	°C
Junction Temperature		TJ	+150	°C
Lead Temperature (Soldering, 10s)		TLEAD	260	°C

Note 2: Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device.

This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply Voltage V+ to V-	V+, V-	± 2	± 18	V
Operating Temperature Range	TA	- 40	+ 85	°C

Low-noise High Voltage Dual Operational Amplifiers

Electrical Characteristics

(Operating Conditions: +Vs=+15V, -Vs=-15V, Ta=25 °C, Unless Otherwise Specified.)

Parameter	Symbol	Conditions	Min	Type	Max	Unit
Supply Current	I _o	no load	-	4.0	7.0	mA
Input Offset Voltage	V _{IO}	R _s ≤10KΩ	-	0.5	3.0	mV
Input Offset Current	I _{IO}	V _{CM} =0V	-	5.0	100	nA
Input Bias Current	I _B	V _{CM} =0V	-	150	500	nA
Maximum Output Voltage Swing	V _{OM}	R _L ≥2KΩ	±12	±13.5	-	V
Input Common Mode Voltage Range	V _{ICM}		±12	±13.5	-	V
Common Mode Rejection Ratio	CMRR	V _{CM} =0V to V _{CC} -1.5V, R _s ≤10KΩ	80	110	-	dB
Large Signal Voltage Gain	A _v	R _L =2KΩ, V _o =±10V	90	110	-	dB
Power Supply Rejection Ratio	PSRR	R _s =10KΩ	80	110	-	dB
Output Sink Current	I _{O1}	V ₋ =1V, V ₊ =0V, V _o =2V	-	80	-	mA
Output Source Current	I _{O2}	V ₊ =1V, V ₋ =0V, V _o =2V	-	45	-	mA
Slew Rate	SR	R _L ≥2KΩ	-	6.0	-	V/μs
Gain Bandwidth Product	GB	R _L =2KΩ, f=±10KHz	-	15	-	MHz
Unity Gain Bandwidth	f _T	A _v =1	-	5.5	-	MHz
Total Harmonic Distortion	THD	A _v =20dB, V _o =5V, R _L =2KΩ, f=1KHz	-	0.0005	-	%
Equivalent Input Noise Voltage	e _n	f=1KHz R _s =50Ω, 30KHz LPF	-	0.46	0.7	μV √ Hz
Thermal Resistance (Junction to Case)	θ _{Jc}	TSSOP-8	-	86	-	°C/W
		TSSOP-8	-	85	-	
		SOIC-8	-	63	-	
		DIP-8	-	43	-	

Low-noise High Voltage Dual Operational Amplifiers

Typical Performance Characteristics

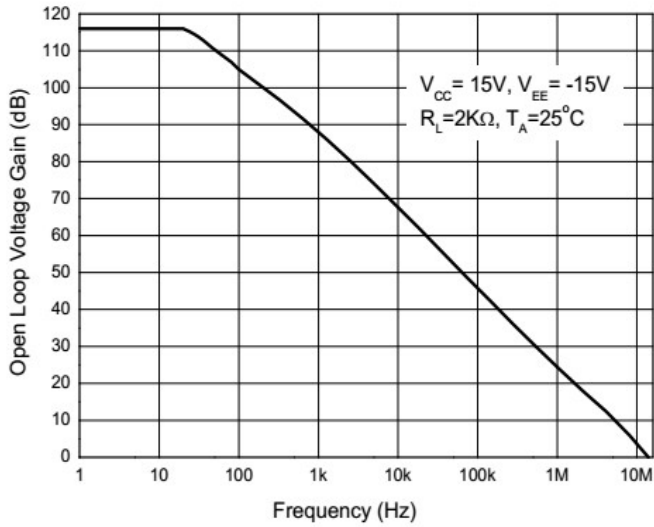


Figure 5. Open Loop Voltage Gain vs. Frequency

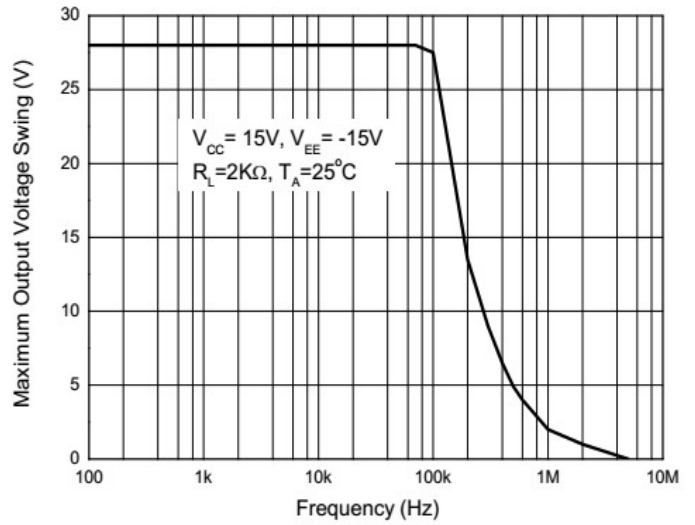


Figure 6. Maximum Output Voltage Swing vs. Frequency

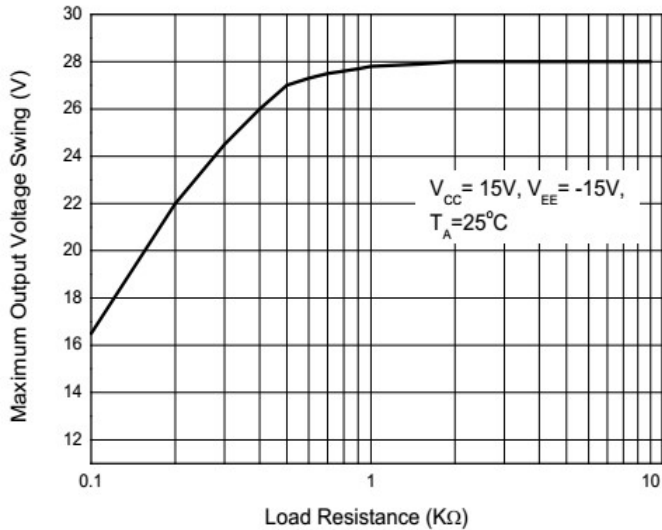


Figure 7. Maximum Output Voltage Swing vs. Load Resistance

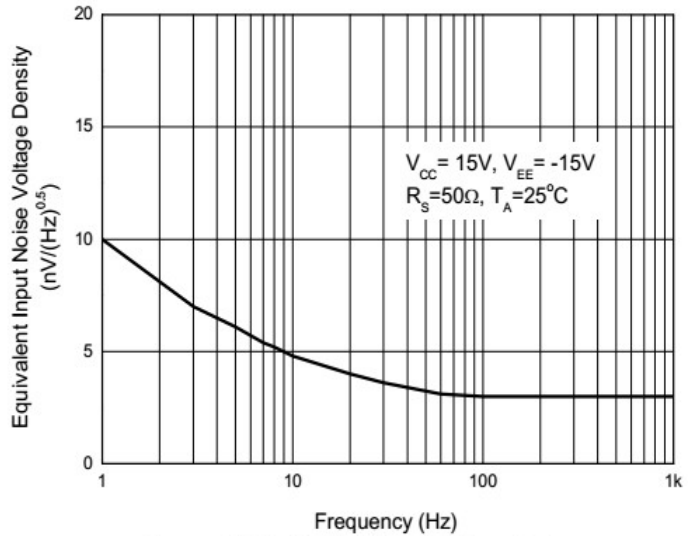


Figure 8. Equivalent Input Noise Voltage Density vs. Frequency

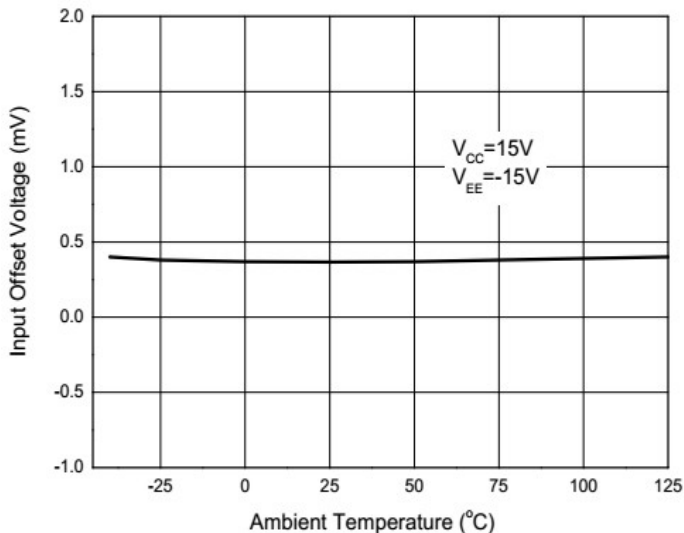


Figure 9. Input Offset Voltage vs. Temperature

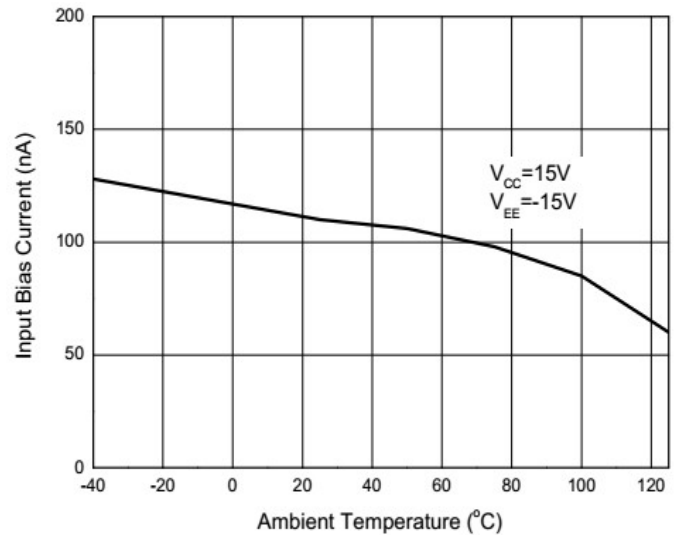


Figure 10. Input Bias Current vs. Temperature

Low-noise High Voltage Dual Operational Amplifiers

Typical Applications Circuit

• RIAA Preamp Circuit

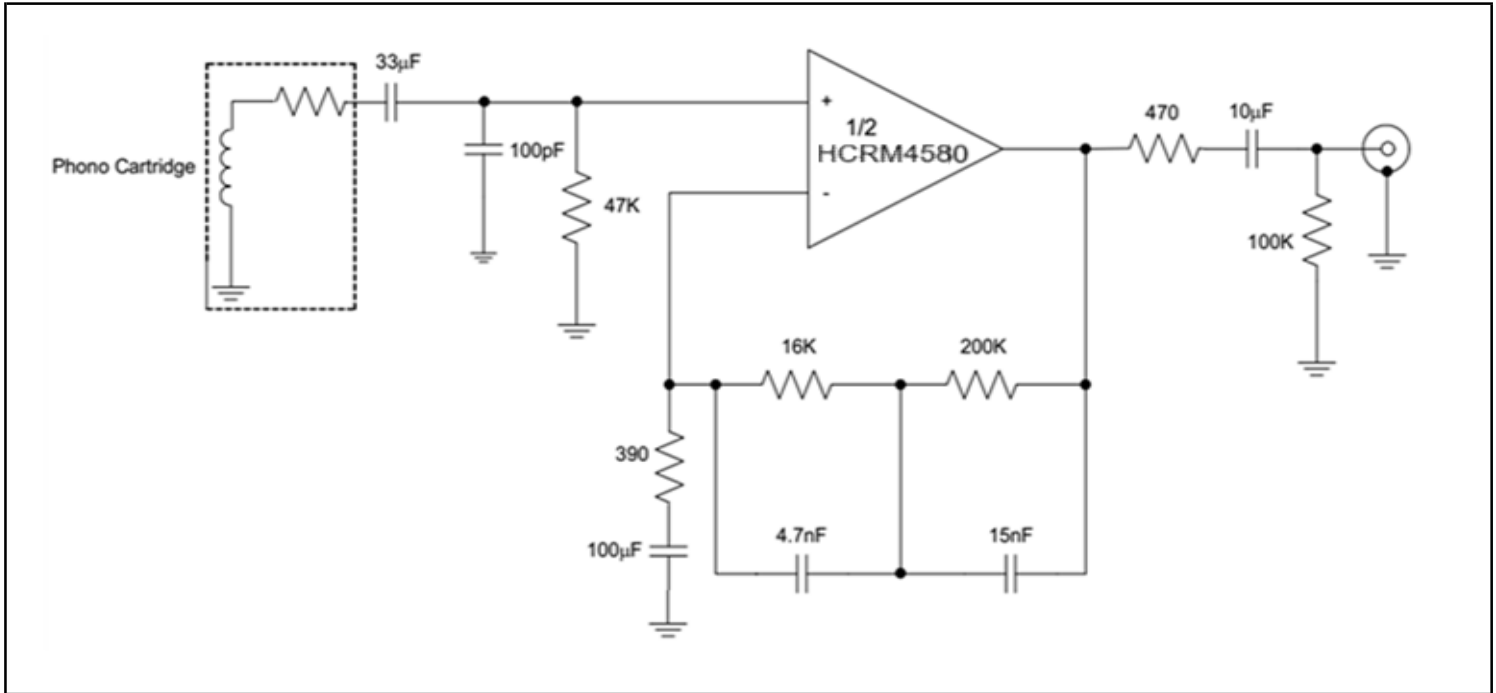


Figure 11. Application of HCRM4580 in a RIAA Preamp

• Tone Control Circuit

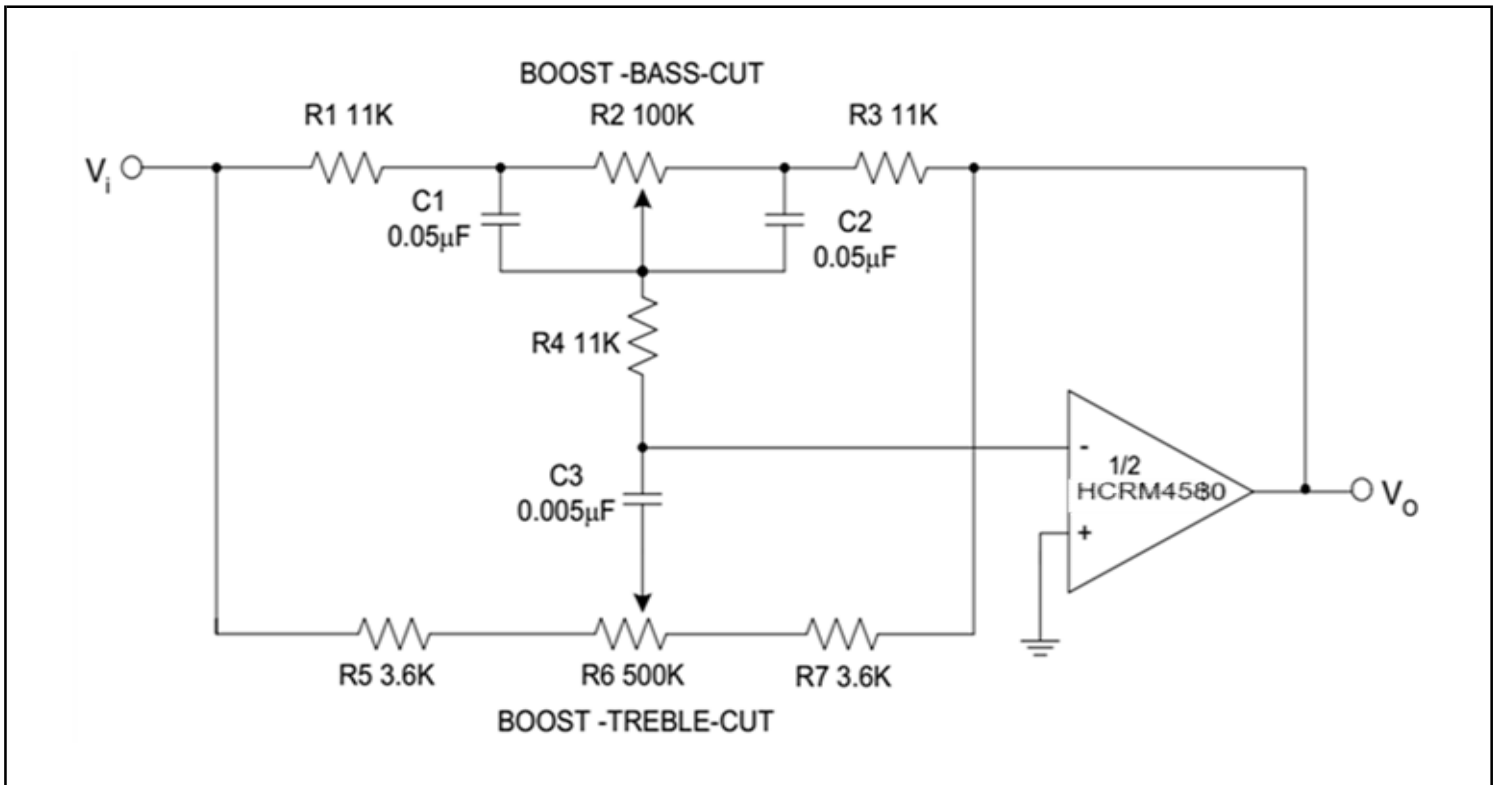
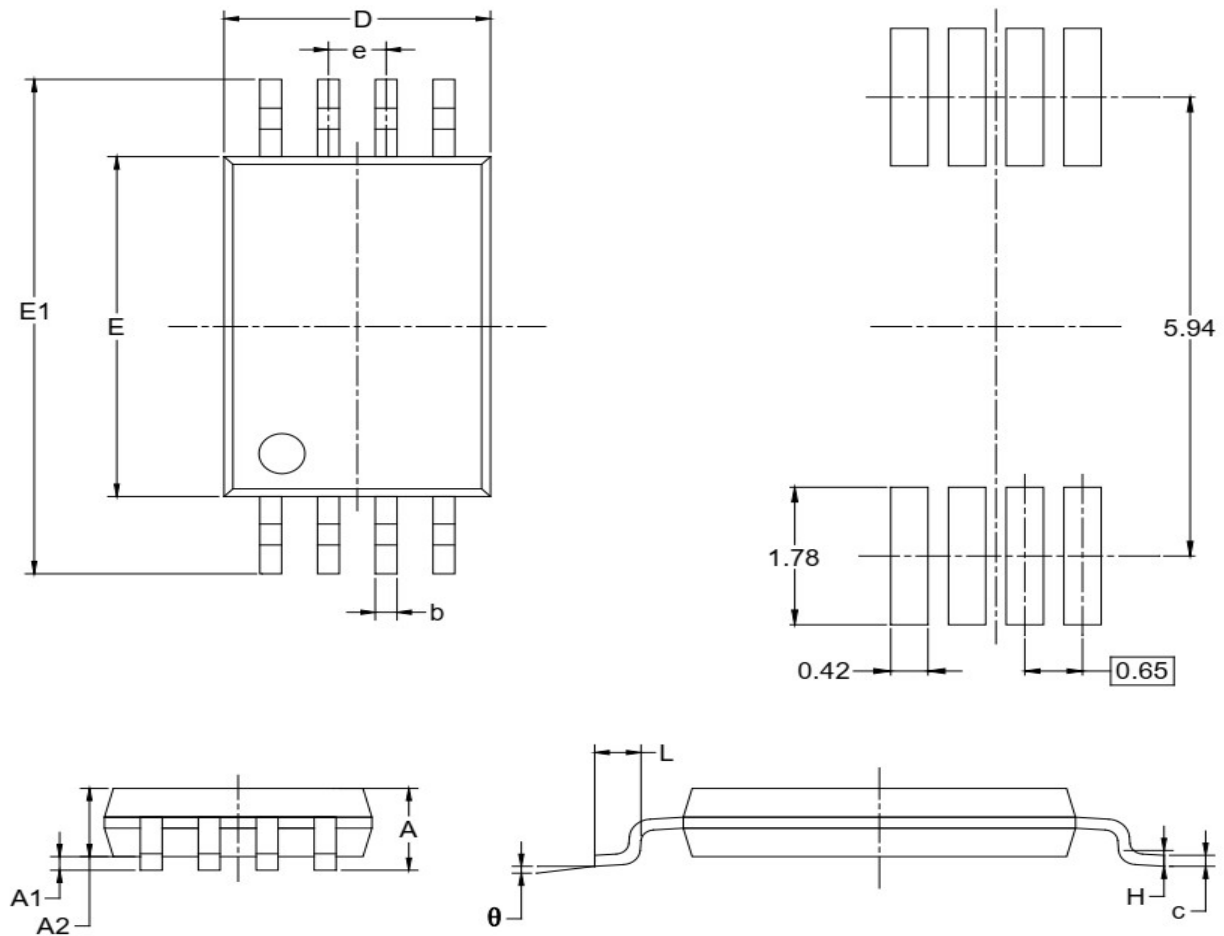


Figure 12. Application of HCRM4580 in Tone Control

Low-noise High Voltage Dual Operational Amplifiers

Mechanical Dimensions

TS8 : TSSOP-8
Unit: mm (inch)


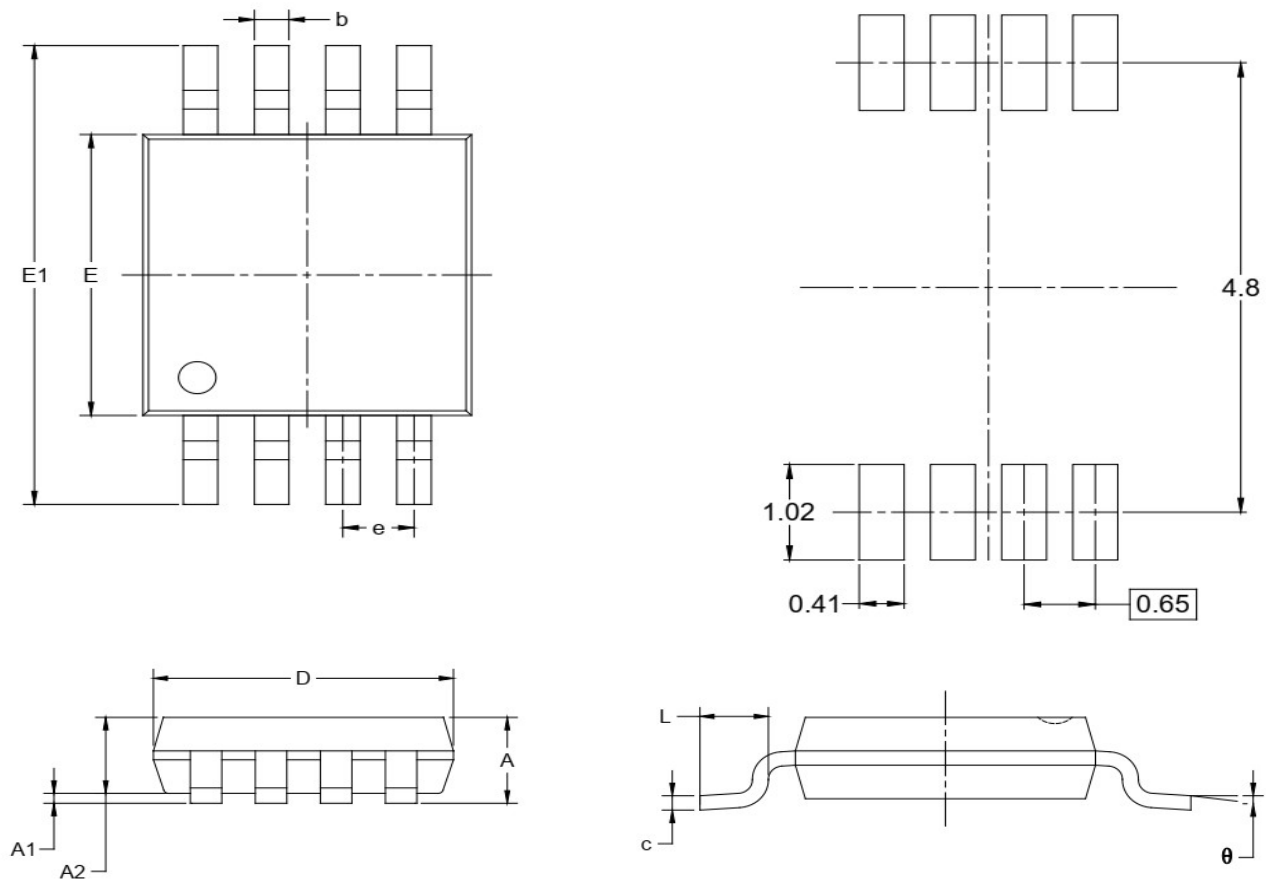
Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A		1.100		0.043
A1	0.050	0.150	0.002	0.006
A2	0.800	1.000	0.031	0.039
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	2.900	3.100	0.114	0.122
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650 BSC		0.026 BSC	
L	0.500	0.700	0.02	0.028
H	0.25 TYP		0.01 TYP	
θ	1°	7°	1°	7°

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

Low-noise High Voltage Dual Operational Amplifiers

Mechanical Dimensions(con.)

MS8 : MSOP-8
Unit: mm (inch)


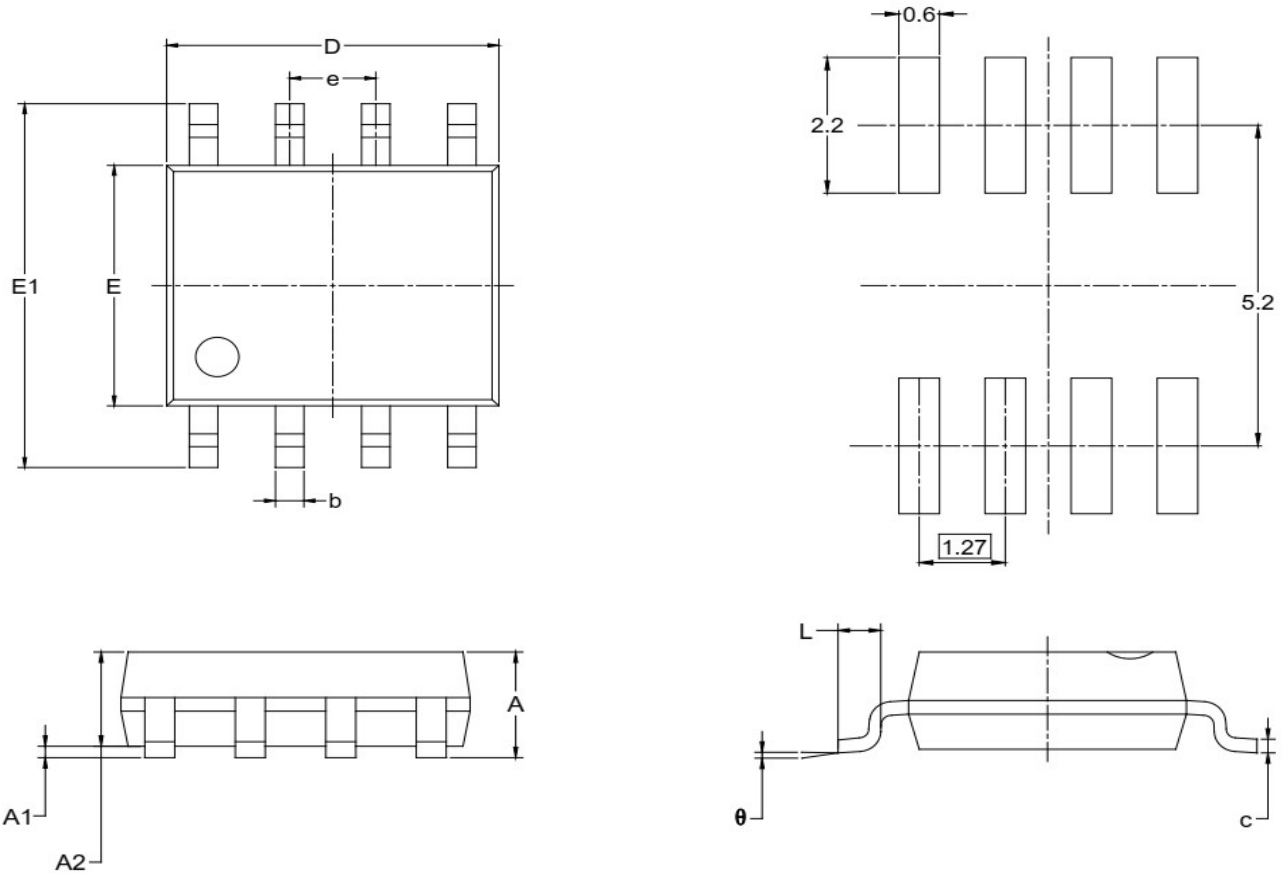
Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Low-noise High Voltage Dual Operational Amplifiers

Mechanical Dimensions(con.)

M8 : SOIC-8/SOP-8
Unit: mm (inch)


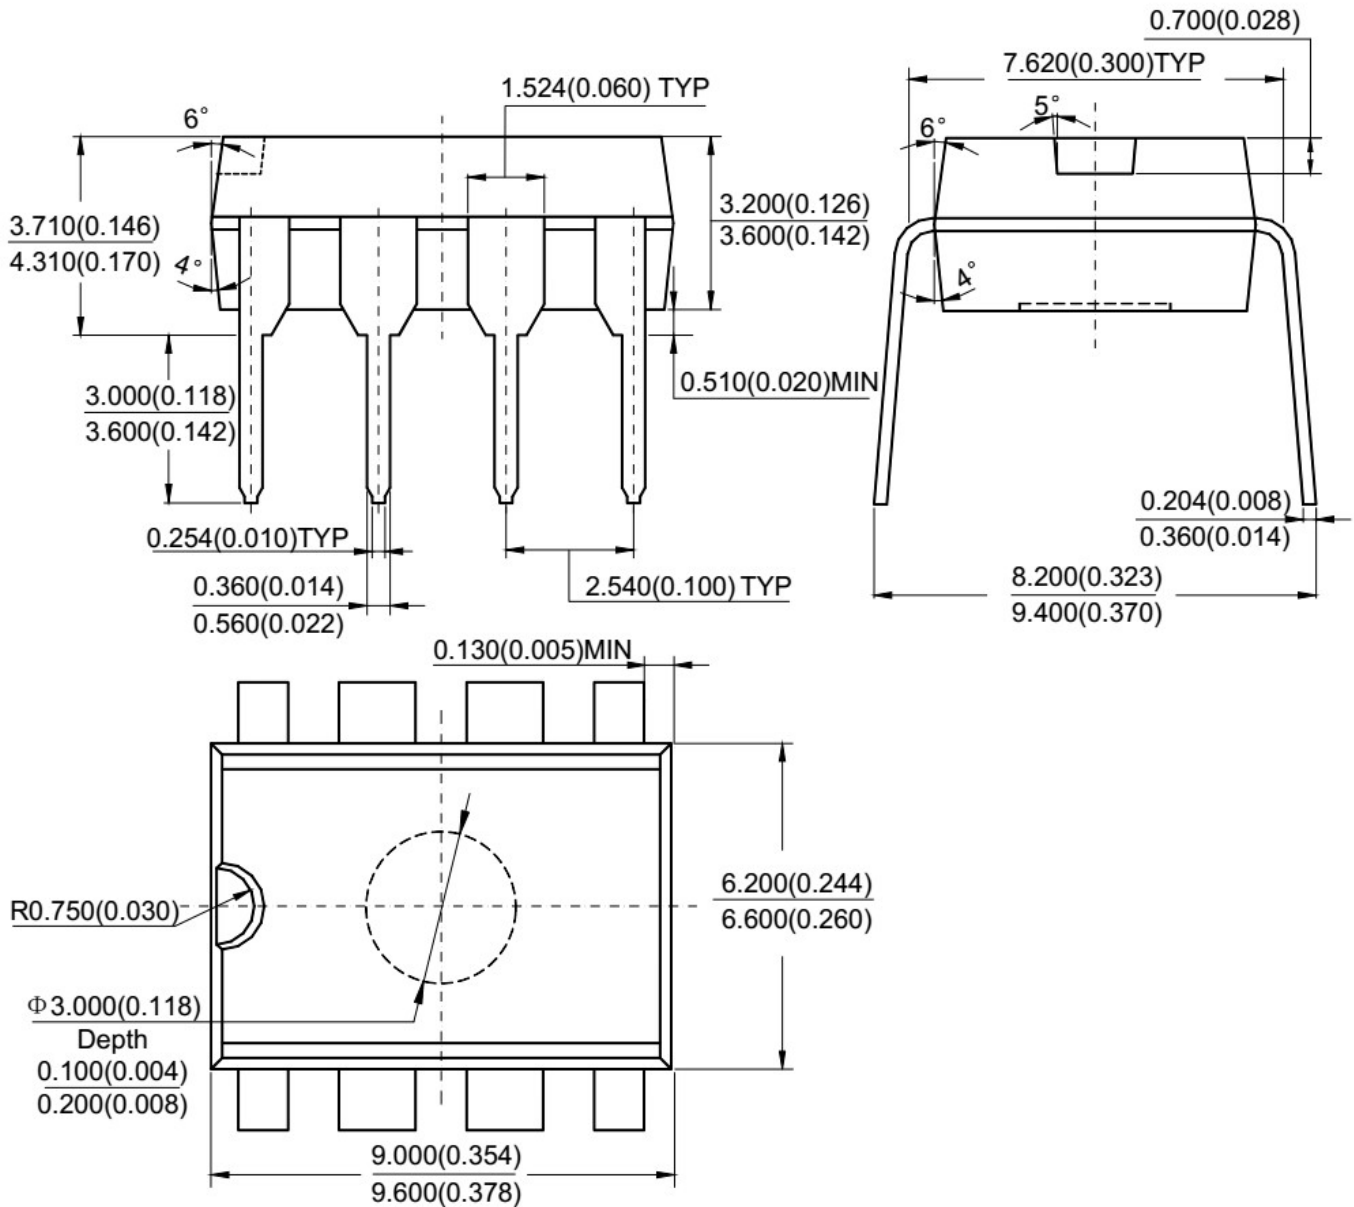
Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Low-noise High Voltage Dual Operational Amplifiers

Mechanical Dimensions (Con.)


DP8 : DIP-8
Unit: mm (inch)


Note: Eject hole, oriented hole and mold mark is optional.


Low-noise High Voltage Dual Operational Amplifiers

TAPE AND REEL INFORMATION

REEL DIMENSIONS

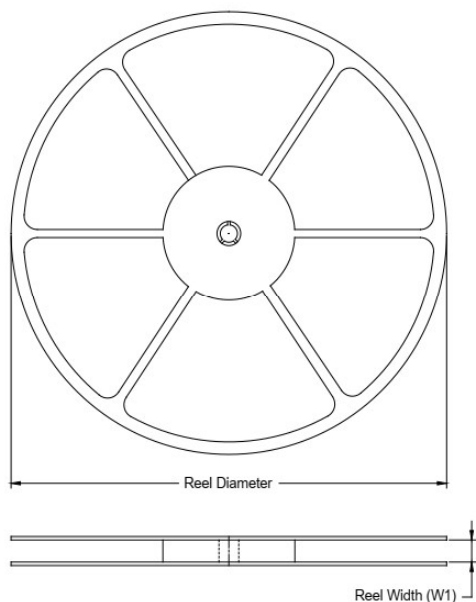

TAPE DIMENSIONS

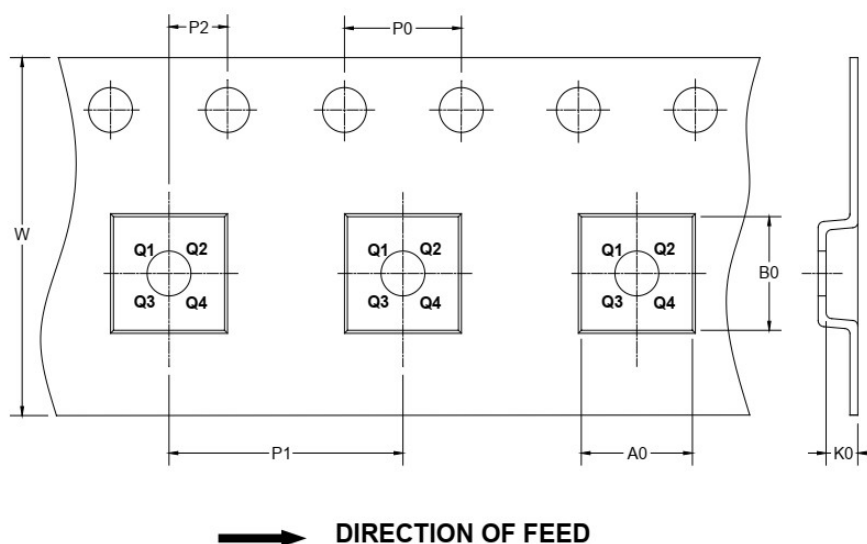


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1
TSSOP-8	13"	12.4	6.76	3.30	1.80	4.0	8.0	2.0	12.0	Q1

Low-noise High Voltage Dual Operational Amplifiers

CARTON BOX DIMENSIONS

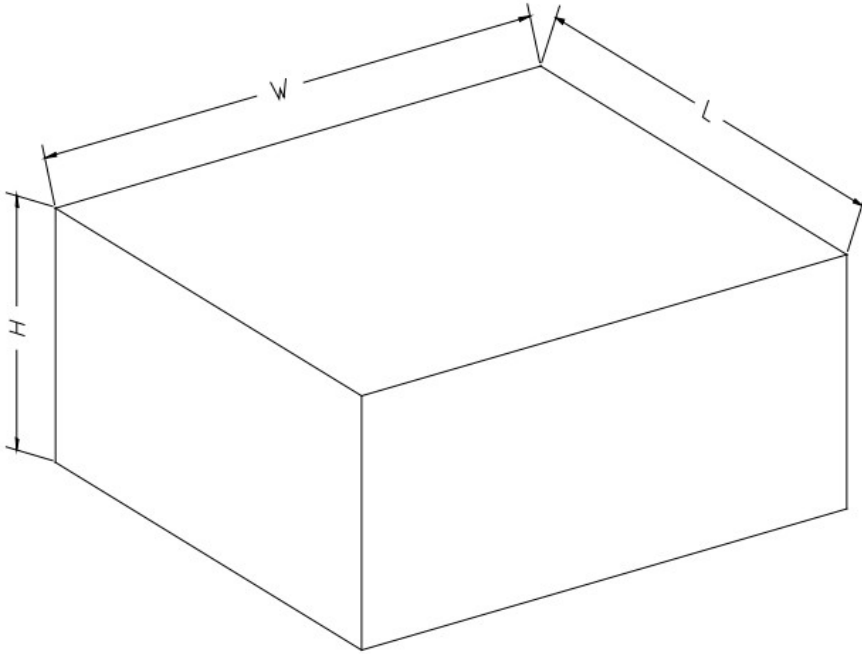

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5